


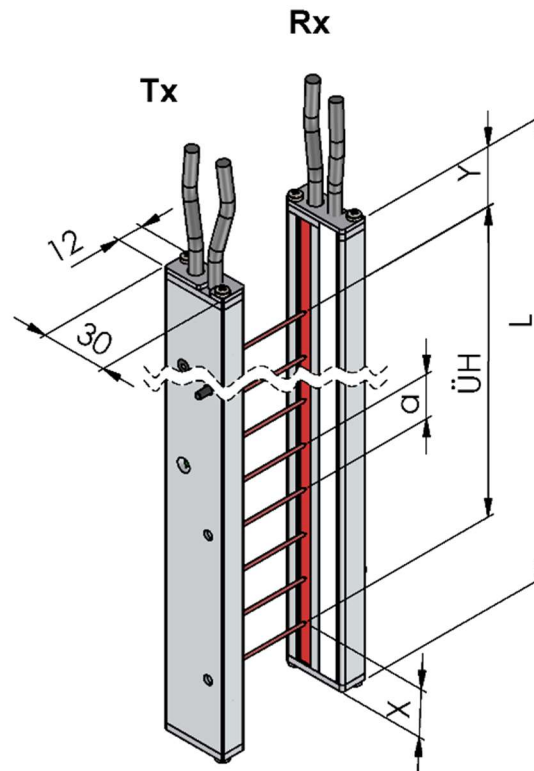

TECHNICAL DATA

T (Type)	LI40/46-2000E-SSB02
TXRX (Transmitter / Receiver)	TX / RX
SA (Beam count)	40
SAB (beam spacing / mm)	46
L (profile length / mm)	2000
MEC (profile / mm)	E – 12 x 30
ÜH (monitoring height / mm)	1794 mm (=39x46mm)
Y (edge distance first beam / mm)	186
X (edge distance last beam / mm)	20
A1 (profile colour)	Clear anodized
D (length connecting cable A2...A4 / dm)	40
A5 (cable outlet)	Front side
A6 (range)	100%
A7 (front covers)	Light grid: polycarbonate red / LED strip: Clip white
A8 (cable type)	PVC
ANIM (beams)	ON
SUPPLY (supply voltage / VDC)	24
LED lighting	LED strip installed at factory